



MODEL : PS15R1 (A)

SPECIFICATION :

2-Way Monitor 15 inch Active speaker cabinet

Built is Active Module Class D 1000 Watt @ 8 Ohm, 32 bit DSP / 48K digital proessor

Power capacity (AES Standards) :

RMS : 1000 Watts

Peak : 4000 Watts

Sensitivity : 135 dB

Impedance : 8Ω

Frequency Response : 45 Hz - 20 Hz



Coverage : 90° x 60°

Recommended Application :

- > Extremely High SPL Point source
- > Stage Monitor
- > Wide coverage

Features :

- > Compact & High Power
- > Built in Active Module with DSP 32 bit / 48K digital proessor
- > Equipped with LCD display
- > Software control via USB-B port
- > DSP controlled input has Preset control knob with preset categories for multiple user programming by software

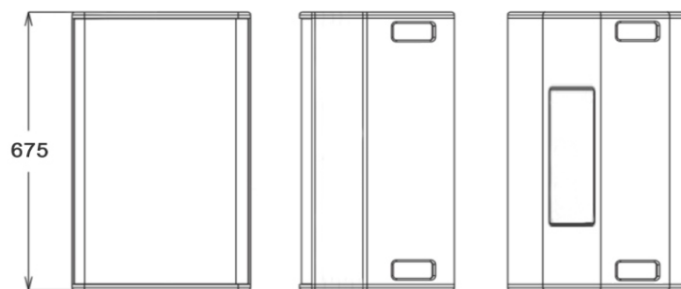

Woofers Section :

LF : 1 x 15 inch

Compression Driver :

HF : 1 x 3 inch voice coil, ø Throat 1.4 inch

Voltage : AC 230V ~ 50/60Hz

Connectors :

Input : Female XLR

Link : Male XLR

RS485 IN/OUT

AC Input : Power

AC Output : AC Link